


These machines are our top-line range of manual joint cutters. They are fully equipped for large workloads, quick commissioning or shutdown, as well as easy control of cutting accuracy.



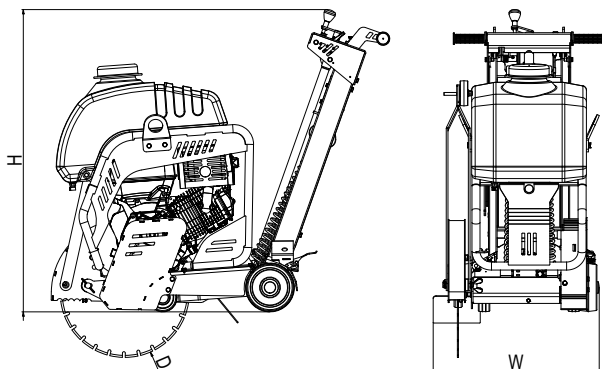

TYPE	Dimensions (mm)			
RZ 202 H	H	W	D <sub>MIN</sub>	D <sub>MAX</sub>
	1055	580	500	520

## TECHNICAL PARAMETERS

### OPERATING PARAMETERS

Weight	[kg]	120
Maximal cutting depth	[mm]	190/200
Blade diameter	[mm]	500/520
Blade connection	[mm]	25,4
Rpm w/o load	[rpm]	2500
Drive	[-]	Manual
Electric start	[-]	No

### ENGINE

Maker and type	Hatz	1 B 30
Fuel	[-]	Diesel
Net power ( 3600 rpm )	[kW]	5,0
Cyclone filter	[-]	No
Emission class	[-]	EU Stage V

### OPERATING FLUIDS

Water tank capacity (sprinkling)	[l]	33
Fuel tank capacity (petrol)	[l]	5
Engine oil capacity (10W/30)	[l]	1,1

### HYGIENIC PARAMETERS

Noise level L <sub>pA,d</sub>	[dB]	104
Noise level L <sub>WA,G</sub>	[dB]	111
Vibration a <sub>hvd</sub>	[m/s <sup>2</sup> ]	14,5

## FEATURES

- Frame design
- Lifting and anchor eyes
- Foot brake
- Integrated sprinkling system
- Sealed bearings in the wheels

## OPTIONAL ACCESSORIES

- Hour counter ☐
- Diamond blade for asphalt ☐
- Diamond blade for concrete and reinforced concrete ☐