


# PRACTIC SERIES

THE CLEAR CHOICE FOR THE MOST DEMANDING

These forward vibratory plates respond to requirements of variability and offer a huge range of variations while maintain the highest quality of processing and work performance.



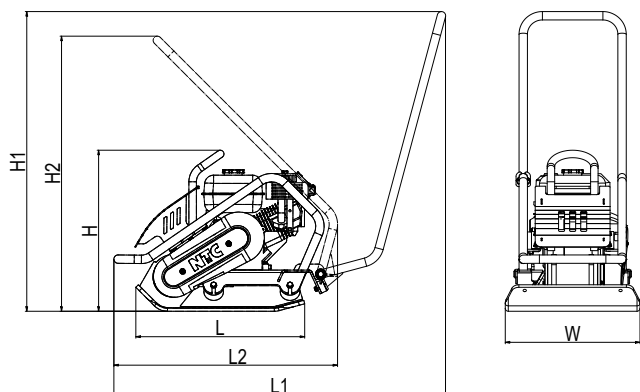

TYP	Machine dimensions (mm)						
VD 20PB	H	H1	H2	L	L1	L2	W
	535	1005	925	565	1115	920	500

## TECHNICAL PARAMETERS

### OPERATIONAL PARAMETERS

Operational weight	[kg]	105
Plate dimensions (W x L)	[mm]	500 x 565
Centrifugal force	[kN]	20
Frequency	[Hz]	100
Maximal speed	[m/min]	25

### ENGINE

Maker and type	B&S	XR 750
Fuel	[-]	Petrol
Net power ( 3600 r./min )	[kW]	3,67
Emission class	[-]	EU Stage V

### OPERATIONAL FLUIDS

Fuel tank capacity (petrol)	[l]	3,2
Engine oil capacity (10W30)	[l]	0,6
Exciter oil capacity (10W30)	[l]	0,07

### HYGIENE PARAMETERS

Noise level $L_{pA,d}$	[dB]	91,5+2,5
Noise level $L_{WA,G}$	[dB]	105
Vibration $a_{hvd}$	[m/s <sup>2</sup> ]	8,2+3,3

## FEATURES

- Frame design
- Folding handle
- Central lifting eye
- Two-staged vibration reduction
- Handling points on all sides of the machine
- Rounded edges of the plate

## OPTIONAL ACCESSORIES

- Sprinkling kit (capacity of the tank 12 l) ☐
- Soft pad for pavement compaction ☐
- Wheel kit for easy handling ☐
- Hour counter ☐
- Trottle lever on the handle ☐